

**PRODUCT SPECIFICATION**

DATE	REV	ECN	DESCRIPTION
8/10/14	A	E29304	SPECIFICATION CREATED

Parent Number: 16 M-5630

Description: 16 19/29 BC TXL per J1128 M5630

Stranding: 19/29 BC LHL

Style: TXL per SAE J 1128, Delphi M5630

Insulation: XLPE

Print Legend: NO PRINT

Voltage: 600V

Temperature: The Temperature Class Rating is 125C. The Temperature Class rating is defined by SAE as "a class designation based on the retention of mechanical properties after 168 hours of aging at 30C above the temperature class rating."

Notes: 1. Temporary part number only - permanent part number to be assigned upon order.

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:


Customer Part Nbr(s): 798445085

Approved By: Mario Robles

Title: Commodity Buyer

Date: 13/08/2014

Company Name: MOEX DE MEXICO

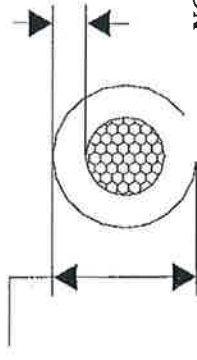

DIAMETER: 0.085

TOLERANCE ± : 0.003

NOM WALL: 0.015

MINIMUM WALL: 0.012

**COLEMAN CABLE, INC**

1530 Shields Drive  
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

