


MARMON AEROSPACE & DEFENSE

680 Hayward Street, Manchester NH 03103, CAGE 61123 2584 South Horseshoe Drive, Naples FL 34104, CAGE 67050 WWW.MARMON-AD.COM/NH 866.303.9473/FL 239.643.6400

Drawing Number 570401U4.1S

Product Type
UL / CSA TYPE AWM

-65°C to +200°C 600 Volts

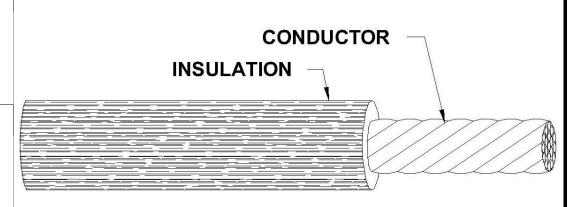

<u>Description:</u> This specification details a 4 AWG high temperature insulated lead wire. It is

recognized by UL and certified by CSA, type AWM, and rated for 200°C and 600 volts

maximum use.

Dimensions (Nom.) 0.255" Nom.

0.319" Nom.

Conductor: Material: Silver Plated Copper

Size: 4 AWG, 133/25

Insulation: Material: Extruded FEP

Wall Thickness: 0.032" Nom.

Color: Green/Yellow

Identification: Insulation is surface printed at 10" nominal intervals

Legend: "E15267-CU UR AWM STYLE 1330 600V 200C, LL62185 CSA AWM

IB 200C 600V FT-1"

SPECIFICATIONS Weight: 157 Lbs./1000' Nom.

Voltage Rating: 600 Volts (RMS) Max.

Temperature Rating: -65°C Min. to 200°C Max.

Drawn By:	Mark Osterhout	2/1/2024	Changes:
Checked By:	Dane Smith	2/2/2024	

PROPRIETARY INFORMATION, DO NOT REPRODUCE WITHOUT WRITTEN APPROVAL FROM MARMON AEROSPACE & DEFENSE. Drawing Number: 570401U4.1S Revision: Page: 1 of 1