

Bottle Shapes, VG style

• Helashrink 150 Series, with rib


This style is used in conjunction with a circular grooved adaptor, providing strain relief and enviromental sealing. For VG shapes with portholes "P" please refer to product standards tables in the appendix.




150 Series supplied.



150 Series boot recovered onto a connector.

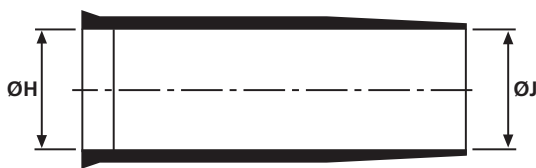

a: Expanded form (supplied)

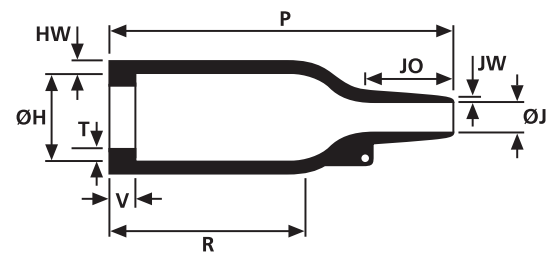

b: Fully recovered form (after heating)

For Material / Adhesive selection and other information please refer to page 10.

Sizes and Type Table												
Type	Designation as per VG-Norm	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	JO ± 10%	HW ± 20%	JW ± 20%	V ± 10%	T ± 20%
152-42	VG 95343 T06 B 001 A	24.0	10.5	24.0	6.0	38.0	21.0	10.0	1.6	0.5	3.0	1.0
153-42	VG 95343 T06 B 002 A	25.0	14.0	9.0	3.5	55.0	28.0	16.0	1.8	0.5	3.0	1.0
154-42	VG 95343 T06 B 003 A	30.0	14.0	30.0	6.0	55.0	32.0	13.0	1.8	1.0	3.0	1.0
155-42	VG 95343 T06 B 004 A	31.0	18.0	31.0	7.0	67.0	35.0	18.0	1.8	1.0	3.0	1.0
156-42	VG 95343 T06 B 005 A	36.0	22.5	36.0	8.5	80.0	42.0	20.0	2.0	1.0	3.0	1.0
157-43	VG 95343 T06 C 001 A	43.0	28.0	43.0	10.0	99.0	61.0	20.0	2.2	1.0	3.0	1.7
158-43	VG 95343 T06 C 002 A	60.0	35.0	60.0	16.0	130.0	72.0	38.0	3.2	1.5	3.0	1.7
159-43	VG 95343 T06 C 003 A	66.0	45.0	66.0	17.0	171.0	90.0	50.0	3.8	2.0	3.0	2.0
160-43	VG 95343 T06 C 004 A	82.0	58.0	82.0	27.0	213.0	113.0	62.0	3.8	3.8	3.0	2.0
152-41	VG 95343 T06 A 001 A	24.0	10.5	24.0	6.0	26.0	9.0	10.0	1.6	0.5	3.0	1.0
153-41	VG 95343 T06 A 002 A	25.0	14.0	9.0	3.5	40.0	13.0	16.0	1.8	0.5	3.0	1.0
154-41	VG 95343 T06 A 003 A	30.0	14.0	30.0	6.0	43.0	20.0	13.0	1.8	1.0	3.0	1.0
155-41	VG 95343 T06 A 004 A	31.0	18.0	31.0	7.0	47.0	15.0	18.0	1.8	1.0	3.0	1.0
156-41	VG 95343 T06 A 005 A	36.0	22.5	36.0	8.5	60.0	22.0	20.0	2.0	1.0	3.0	1.0
159-41	VG 95343 T06 A 008 A	66.0	45.0	66.0	17.0	130.0	50.0	50.0	3.8	2.0	3.0	2.0
157-42	VG 95343 T06 B 006 A	43.0	28.0	43.0	10.0	79.0	41.0	20.0	2.2	1.0	3.0	1.7
158-41	VG 95343 T06 A 007 A	60.0	35.0	60.0	16.0	90.0	32.0	38.0	3.2	1.5	3.0	1.7
159-41	VG 95343 T06 A 008 A	66.0	45.0	66.0	17.0	130.0	50.0	50.0	3.8	2.0	3.0	2.0
159-42	VG 95343 T06 B 008 A	66.0	45.0	66.0	17.0	150.0	70.0	50.0	3.8	2.0	3.0	2.0
160-41	VG 95343 T06 A 009 A	82.0	58.0	82.0	27.0	137.0	37.0	62.0	3.8	3.8	3.0	2.0
160-42	VG 95343 T06 B 009 A	82.0	58.0	82.0	27.0	158.0	58.0	62.0	3.8	3.8	3.0	2.0

All dimensions in mm. Subject to technical changes.