


CONFIDENTIAL

PP08657EF
(MOLEX 19006-0001)
Flag terminal 2 places

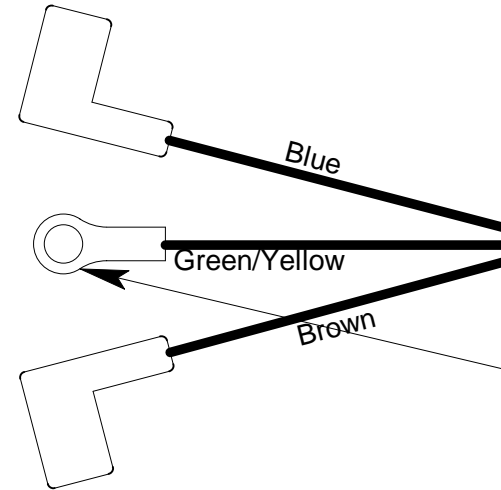


Wire length including connectors on this end to be 2 7/8" long.

PP06044EF
(Molex 19073-0017)
2 places

Wire length including connectors on this end to be 3 1/2" long.

PP16368FF
(MOLEX 19602-1100)
2 places

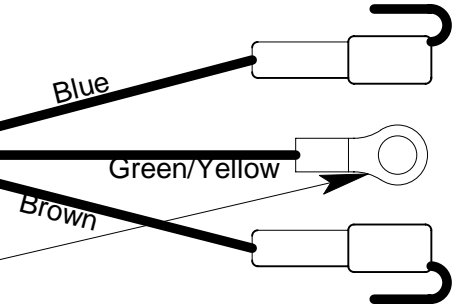

Notes:

Material: 18/3 SJT 60° C Black
Safety Standard Approval: RoHs

1) All wire to be #18 AWG Stranded Tin Copper with PVC insulation rated 600V and meeting UL 1015 and CSA TEW-105.

2) Terminal crimps must be of type to satisfy TUV requirements.

1

REFERENCE ONLY

APPROVAL	Name	Date
ENG		
MFG		
Q.A.		

SHEET 1 OF 2

PRINT CHK BY

DAREX CORPORATION

220 HERSEY -P.O.BOX 277 ASHLAND,OR. 97520
Telephone # 503-488-2224 Fax # 503-488-2229

Revision

1

TITLE XT-3000 Motor Wire Harness

PART # PP16010EF

SCALE None

BY JRG

DATE 10/10/02

DWG. # HY16010

**REFERENCE
ONLY**

CONFIDENTIAL

	SHEET 2 OF 2			
	PART # PP16010EF			
	REVISION NOTES			
REASON FOR CHANGE		DATE	RME	DESIGN
1) Added note for Safety standard approval per RFC#353		3/21/06		JDW

APPROVAL	Name	Date
ENG		
MFG		
Q.A.		

**DOCUMENT
CONTROL**