

1) CONSTRUCTION:  
 CONDUCTOR: 18 AWG 16/30 STRANDED TINNED COPPER  
 INSULATION: POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS  
 CABLE: (5) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE.  
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS  
 NOM. DIA.  
 .045"  
 .077"  
 .208"  
 OVERALL CABLE DIAMETER .272"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C, 80°C & 105°C  
 WT./M', NOM., NET. 52.0 LBS.  
 BEND RADIUS, MIN. 2.72"

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL, NOM. 25 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 2000V RMS  
 VOLTAGE RATING, MAX. 600V  
 D.C. RESISTANCE, MAX. PER ASTM B286 7.15 Ω/1,000'


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 UL STYLE 2464  
 CSA AWM FT4


5) APPLICATION:  
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 4105R (UL) TYPE CM 18 AWG OR AWM 2464 80C 300V OR AWM 2586 105C 600V --  
 CSA LL51726 AWM I/II A/B 105C 600V FT4 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK  
 2. WHITE  
 3. RED  
 4. GREEN  
 5. BROWN

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

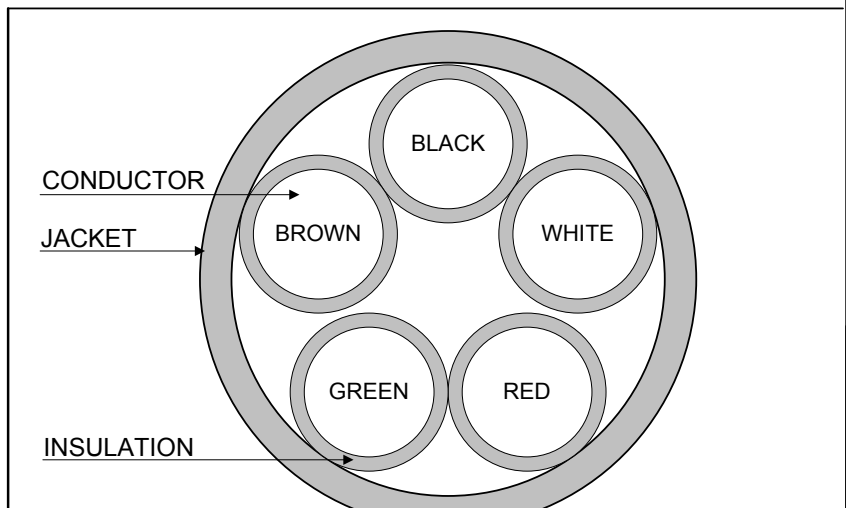

REVISION 05	DATE:	DRAWN J. RIVERNIDER 11/04/94	
REVISED BY	<i>B. Duceyuski</i> 9/8/11	CHECKED G. MELNIK 11/04/94	
CHECKED	<i>G. Munnis</i> 09/08/11	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE
			5/C 18 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, STYLE 2586, CSA AWM FT4
			QUABBIN P/N 4105
			1 OF 1