

1) CONSTRUCTION:  
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER  
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS  
 CABLE: (5) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE  
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS  
 NOM. DIA.  
 .030"  
 .050"  
 .135"  
 OVERALL CABLE DIAMETER .199"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C & 80°C  
 TEMPERATURE RATING, MIN. -30°C  
 WT./M', NOM., NET. 24.5 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL, NOM. 28 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN. 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/1000'


4) AGENCY APPROVALS:  
 (UL) NEC TYPE CM  
 CSA AWM FT4  
 UL STYLE 2464

5) APPLICATION:  
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT.

6) PRINT:  
 QUABBIN 7131 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 --  
 RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK  
 2. WHITE  
 3. RED  
 4. GREEN  
 5. BROWN

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

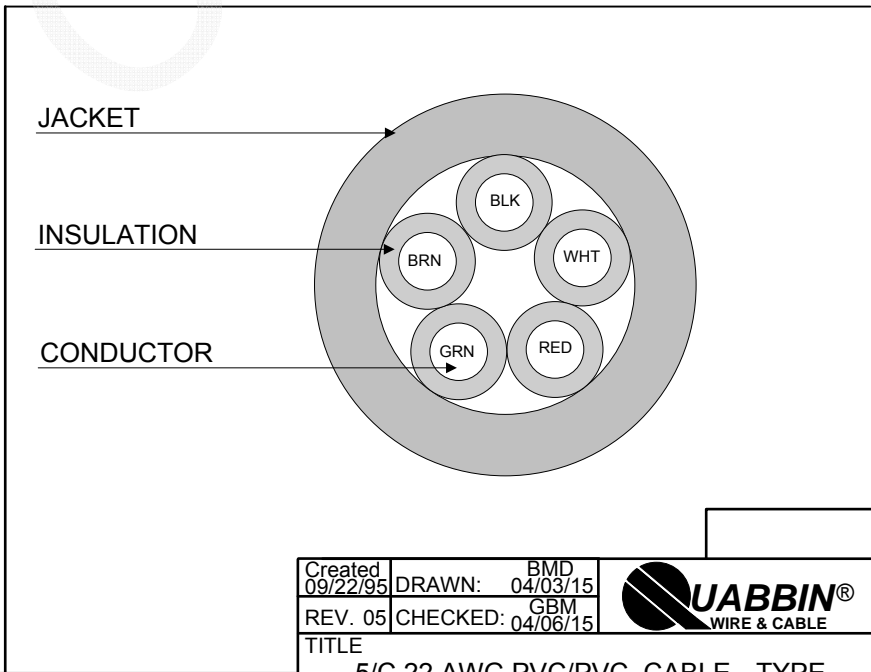

CUSTOMER APPROVAL:

DATE:

Created 09/22/95	DRAWN: BMD 04/03/15	
REV. 05	CHECKED: GBM 04/06/15	
TITLE 5/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	7131	1 of 1