

1) CONSTRUCTION:  
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER  
 INSULATION: POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS  
 CABLE: (9) INSULATED CONDUCTORS TWISTED TOGETHER WITH FILLER TO FORM A CABLE CORE  
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS

NOM. DIA.  
 .030"  
 .050"  
 .182"  
 OVERALL CABLE DIAMETER .246"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C & 80°C  
 WT./M', NOM., NET. 41.4 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL 18 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 OHMS/M'


4) AGENCY APPROVALS:  
 (UL) NEC TYPE CM  
 CSA AWM FT4  
 UL STYLE 2464 80C 300V


5) APPLICATION:  
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 7150R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

- 7) COLOR CODE:  
 1. BLACK  
 2. RED  
 3. WHITE  
 4. GREEN  
 5. ORANGE  
 6. BLUE  
 7. BROWN  
 8. YELLOW  
 9. VIOLET

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

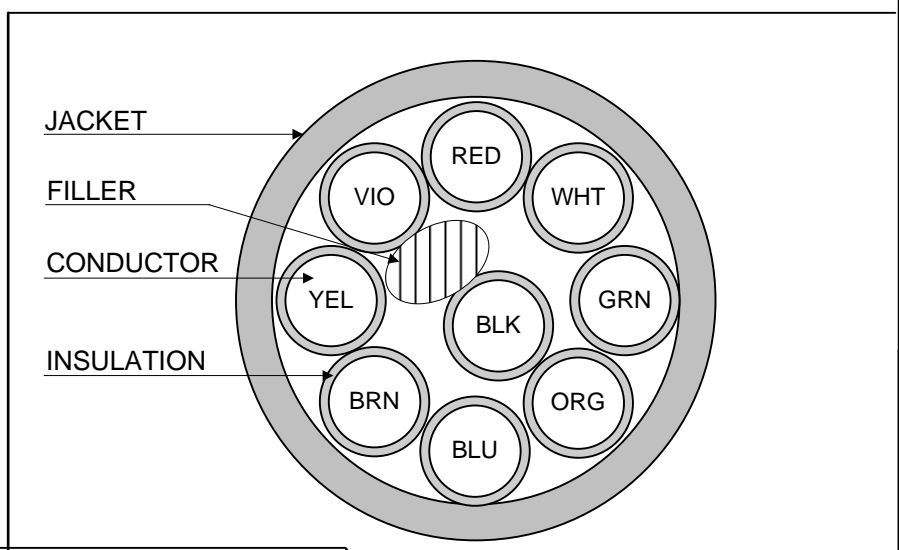

REVISION 04	DATE:	DRAWN S. ADDIE	08/08/96	
REVISED BY	B. M. DUCZYNSKI 4/5/05	CHECKED J. RIVERNIDER	08/08/96	
CHECKED	G. MELNIK 4/6/05	CHECKED G. MELNIK	08/08/96	
CHECKED		CUSTOMER APPROVAL:	DATE:	TITLE
				9/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4
				QUABBIN P/N 7150 1 OF 1