


REV.	DESCRIPTION	DATE
0	Initial Release.	05/06/2005
1	Revised insulation material	12/20/2005

General Properties:

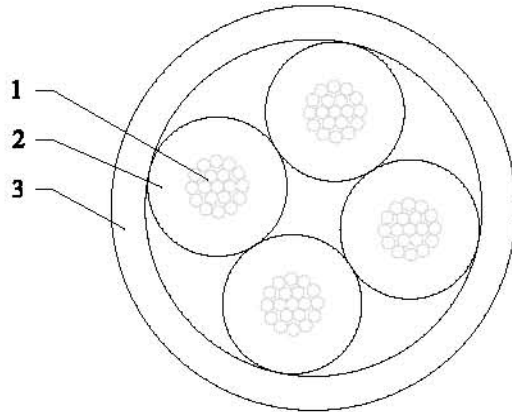


Color Code	
1	RED
2	GREEN
3	BLACK
4	YELLOW
Jacket	BLACK

Cable Construction:

	Description	Dimensions (nom.)
1. Conductor:	20 AWG 19/32 Tin Plated Copper	0.038" [0.96mm]
2. Insulation:	RADXL 125HF, 23 mil [0.58mm] wall nominal	0.084" [2.13mm]
Cabling:	Twist 4 primaries Lay Length: 2" nominal (left hand)	0.203" [5.16mm]
3. Jacket:	RADXL 150FX, run wall to OD (ref. 20.5 mil [0.52mm])	0.244" [6.20mm]

Technical Details:

Voltage Rating: 60 V nominal system voltage
Temperature Rating: -40 °C to +125 °C
Reference: Leoni 3660720

 175 HERCULES DRIVE COLCHESTER, VT 05446 802-654-4200	TITLE		RADXL 125 20 AWG CABLE 4x20 AWG 19/32 Type GXL RADXL FX Jacket	
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS AND TOLERANCES ARE IN INCHES DO NOT SCALE THIS DRAWING	DRN.		DATE
Scott Hood		05/06/2005		
CKD.		DATE		
SIZE		PART NUMBER		DOCUMENT NUMBER
A		To Be Determined		12823
The information on this drawing is the proprietary property of Champlain Cable Corporation, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization.				PAGE 1 of 1