


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
8/26/2010	F	E14074	ADD STRIP FORCE

Parent Number: F02013-

Description: 2 133/.0220 BC SGX per J1127 Ink Print

DIAMETER: 0.428
TOLERANCE ±: 0.010

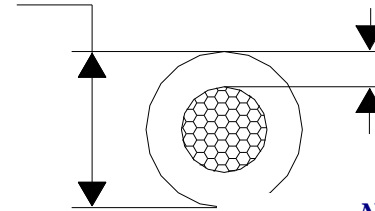

NOM WALL: 0.065

MINIMUM WALL: 0.045

Stranding: 133/.0220 BC LHL

Style: SGX per SAE J1127

Insulation: XLPE

Print Legend: 2 GA SAE J1127 TYPE SGX

Voltage: Per SAE J 1127 this product is intended for use at a nominal system voltage of 60 Volts DC or less in surface vehicle electrical systems.

Temperature: The Temperature Class Rating is 125C. The Temperature Class rating is defined by SAE as " a class designation based on the retention of mechanical properties after 168 hours of aging at 30C above the temperature class rating".

- Notes:**
1. Pull Force: 10# minimum, 50# maximum on a 1/2" plug
 2. Paper separator is used between the copper conductor and insulation.

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

