



DESC: 18/4 SJEOW 105°C 300V

DWG NO: FSJE184-008

SCALE: 15x

DATE: 10/16/09

DR. BY: KEN D

NWI P/N: FSJE184-008


**NORTHWIRE RESTRICTED**

*This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.*

CUSTOMER: IEWC

CUSTOMER P/N: SJE1804OWS-0/105C

ITEM	SPECS.
A.	18 GAUGE 16X30 BARE COPPER BUNCHED O.D. .049 ± .003"
B.	30 MILS TPE INSULATION 27 MILS MIN. TPE INSULATION O.D. .110 ± .002"
C.	20 GAUGE 7X.0121 TINNED COPPER DRAIN
D.	ALUMINUM FOIL SHIELD (FOIL IN)
E.	30 MILS PRESSURED TPE JACKET 24 MILS MIN. TPE JACKET BLACK JACKET
CABLE IS UL AND CSA APPROVED	

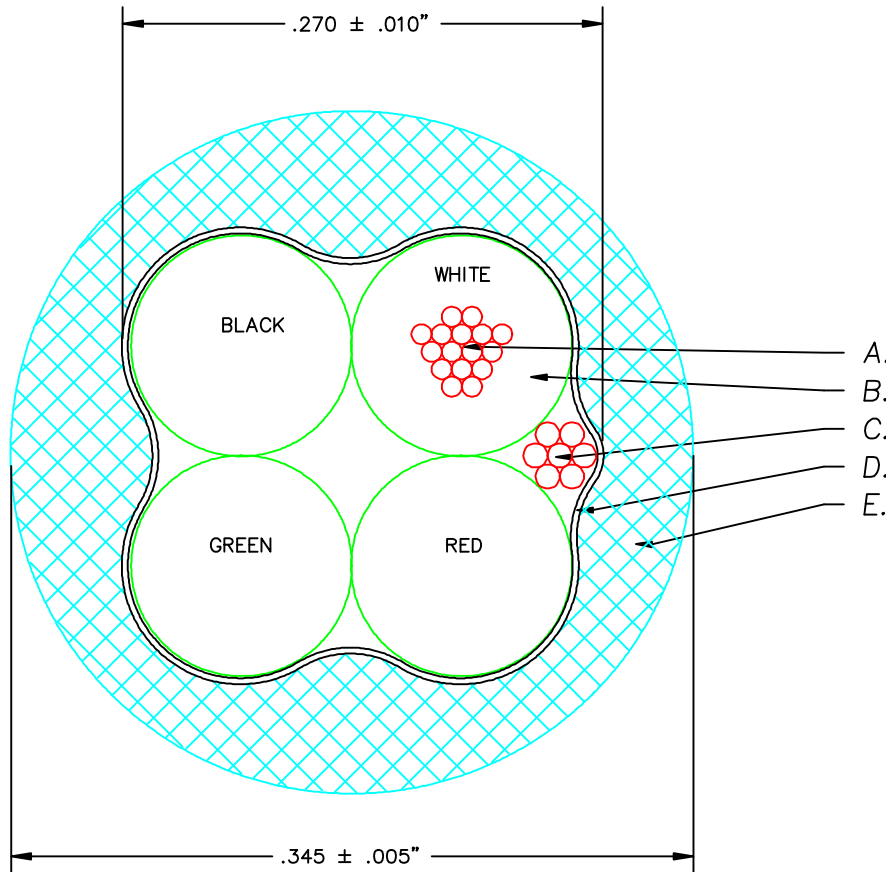

ELECTRICAL REQUIREMENTS:  
NONE SPECIFIED

MECHANICAL REQUIREMENTS:  
NONE SPECIFIED

INITIAL RELEASE	A	10/16/09	KAD	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL