


RD035-6060A5909 - 18/5 16/30 BC SJT 105C OD 0.370"

7/28/2008

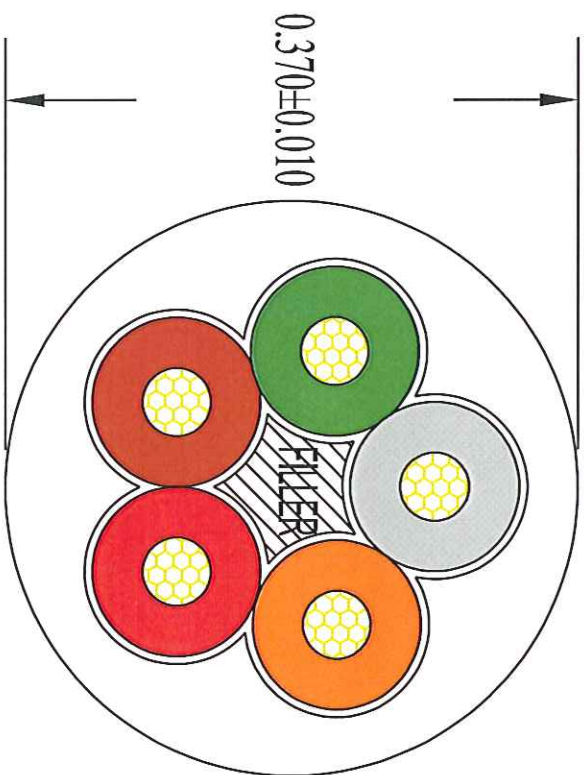

Color pattern shown as finished  
product pays off reel.

PRINT LEGEND: E132814 (E) SIC 18 AWG (0.824mm<sup>2</sup>) (UL) SJT 105C 300V VW-1 --- 182067 (E) SIC 0.824mm<sup>2</sup> (18AWG) CSA SJT 105C 300V FT2

NOTES:

1. Inners: 18 16/30 BC PVC Insulated, 105°C,  $\phi = 0.109 \pm 0.003$ "
2. Color Pattern: Gray; Orange, Dk Red, Dk Brown, Dk Green, Filler in Center
3. Filler: Paper
4. Separator: Paper & Talc Powder
5. Jacket: JMT White PVC, 105°C, Hardness 84-A, Min Ave Wall = 0.030", Min Pt Wall = 0.024", Pressure Extrusion
6. Print: Indent

Approved By: \_\_\_\_\_

Date: \_\_\_\_\_

Revisions:

DATE	REV	ECN	CHANGE	
11/9/2007	A	19057	SPECIFICATION CREATED	
7/28/2008	B	1248-08	ADDED FILLER	

**Copperfield, LLC.**  
1115 W. Plymouth St.  
Bremen, IN 46506  
By: Keith McGrew