


Carolprene® Jacketed Type SOOW

90°C, 600 Volt, Non-UL Portable Cord

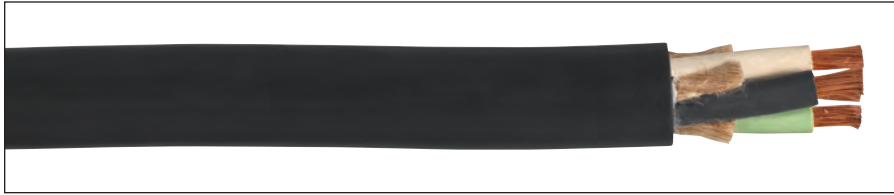

TYPE SOOW, NON-UL – 600 VOLT

CATALOG NUMBER	NO. OF COND.	AWG SIZE	COND. STRAND	NOMINAL INS. THICKNESS		NOMINAL O.D.		CURRENT AMPS†	APPROX. NET WT. LBS/M' (S)	STD. CTN.
				INCHES	mm	INCHES	mm			
01811*	2	8	65/26	0.050	1.27	0.660	16.76	40	278	250'
01812	3	8	65/26	0.050	1.27	0.695	17.65	40	343	250'
01827	4	8	65/26	0.050	1.27	0.760	19.30	35	442	250'
98267	5	8	65/26	0.050	1.27	0.840	21.34	28	542	250'
01825	3	6	101/26	0.050	1.27	0.790	20.07	55	482	250'
01824	4	6	101/26	0.050	1.27	0.865	21.97	45	599	250'
98270	5	6	101/26	0.050	1.27	0.945	24.00	36	750	250'
01823*	2	4	119/25	0.050	1.27	0.870	22.09	70	515	250'
01822	3	4	119/25	0.050	1.27	0.925	23.49	70	683	250'
01821	4	4	119/25	0.050	1.27	1.015	25.78	60	851	250'
98463	5	4	119/25	0.050	1.27	1.115	28.32	48	1039	250'
01819	3	2	133/.0211	0.055	1.40	1.085	27.56	95	1003	250'
01818	4	2	133/.0211	0.055	1.40	1.170	29.72	80	1248	250'
98187	5	2	133/.0211	0.055	1.40	1.390	35.31	64	1684	250'

* Non-stock item; minimum quantity purchase required.

† Green conductor for grounding only. Ampacities based on NEC Table 400.5(A)(1).

(S) Actual shipping weight may vary.

Product Construction:

Conductors:

- 8 through 2 AWG fully annealed stranded bare copper

Insulation:

- Premium-grade, color-coded 90°C EPDM
- Color code: See chart below

Jacket:

- Carolprene®, black
- Temperature range: -40°C to +90°C

Jacket Marking:

- CAROL (SIZE) TYPE SOOW 90°C P-7K-123033
- MSHA 600 VOLT ROHS MADE IN USA

Applications:

- Portable tools and equipment
- Temporary and portable power
- Motors and associated machinery

Features:

- Excellent resistance to oil and moisture
- Good tensile strength, elongation and aging characteristics
- High flexibility
- Excellent abrasion resistance
- Ozone-, sunlight (UV)- and weather-resistant

Industry Approvals:

- MSHA Approved
- RoHS Compliant

Packaging:

- 250' (76.2 m), 500' (152.4 m), 1000' (304.8 m)
- Other put-ups available on special order

COLOR CODE CHART

NO. OF CONDUCTORS	COLOR
2	Black, White
3	Black, White, Green
4	Black, White, Red, Green
5	Black, White, Red, Green, Orange

