

Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
bhanlon@huesonwire.com

Issue Date: 5/17/2016

Construction C5660 Black

Issue: 1

Description: 3/C 18 16/30 BC STOOW 105°C 600V		Diam. (In)
Component:	3 Conductors	
Conductor:	18 AWG 16/30 Bare Copper to ASTM B-174	0.048"
Insulation:	0.03" Premium Grade 105°C Insulation	0.108"
Color Code:	Black, White, Green/Yellow (Spiral Stripe)	0.108"
Cable Assembly:	3 Conductors Bunched Cabled	0.232"
Fillers	Fibrillated polypropylene or solid fillers for roundness (optional)	0.232"
Tape:	Non-Woven Separator Tape for Strip-Ability (optional)	0.235"
Jacket:	0.062" Premium Grade UL PVC	0.359"
Jacket Color:	Black	0.359"
Print: White Surface Print	(UL) E322633 18/3 STOOW 105C 600V FT-2 --- c(UL) STOOW 3/C 0.824mm ² (18 AWG) 105C 600V FT-2	

Specifications:	<u>UL List</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>
UL	STOOW	105°C	600	FT-2
Canadian cRU	STOOW	105°C	600	FT-2

Environmental Compliance

- EU Directive 2011/65/EC(RoHS):
- REACH Regulation (EC 1907/2006):
- California Prop 65:


IQ160214



Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 5/17/2016
Issue: 1

Drawing/Rotation:

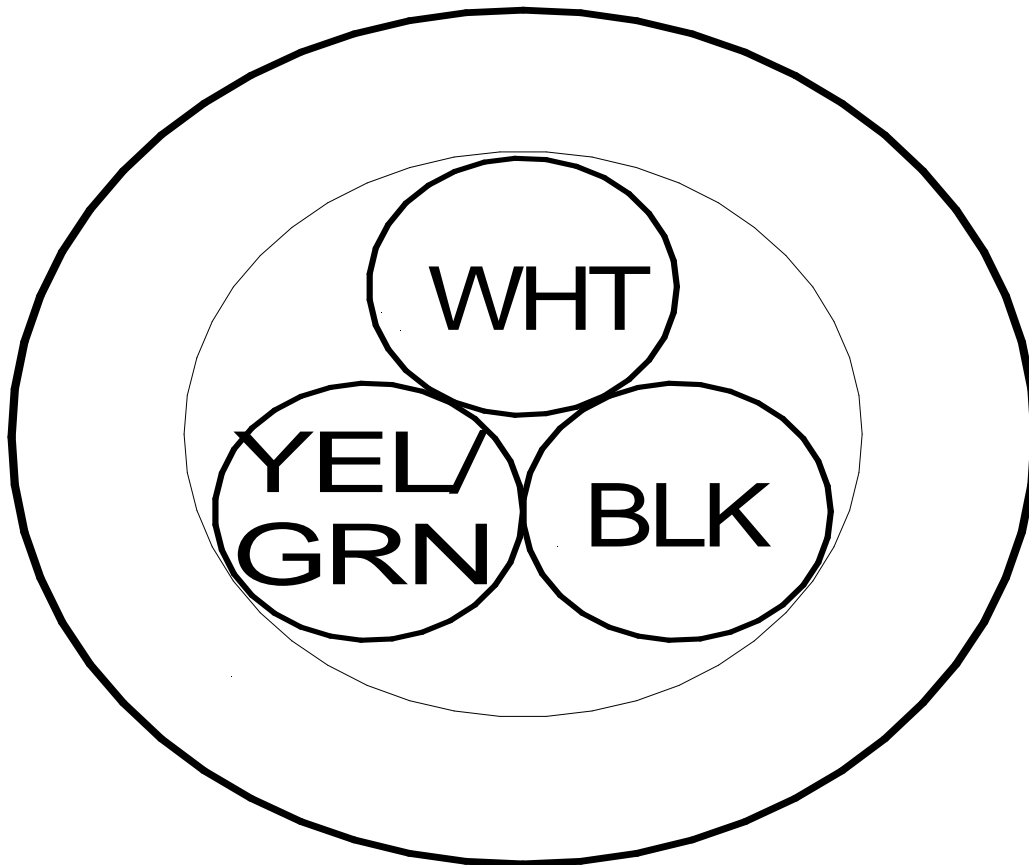

IQ160214