


**AWC195 Computer Interconnect Cable
Multi-conductor Shielded - Flat (oval)**

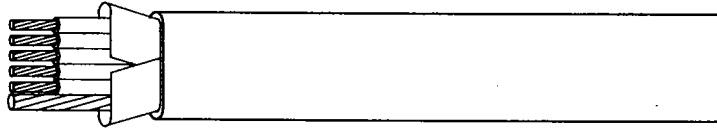

Flat (oval) multi-conductor shielded modular type computer interconnect cable consisting of stranded tinned copper conductors with thermoplastic insulation and a 22 AWG stranded fused tinned copper drain wire with an overall 100% coverage aluminum/polyester shield in a PVC (Polyvinyl chloride) jacket.

AWC Standard Number	Number of Conductors	AWG & Stranding	Insulation Thickness (Nom. in.)	Jacket Thickness (Nom. in.)	Outside Dimension (Nom. in.)
AWC19510	5	24-7/32	0.007	0.033	0.106 X 0.280
AWC19511	5	26-7/34	0.009	0.033	0.106 X 0.280
AWC19512	5	28-7/36	0.011	0.033	0.106 X 0.280

NOTE

Color code: 1) Blk, 2) Wht, 3) Red, 4) Grn, 5) Brn

Available jacket colors: A = Black

CP = Chrome Gray


Available put-ups: 500, 1,000, 2,500, 5,000, 10,000 foot reels

Ordering example: AWC19510-A-500

Other color codes and/or jacket colors available upon request.

UL Recognition labeling available upon request.

**AWC195 Computer Interconnect Cable
Multi-conductor Shielded - Flat (oval)**

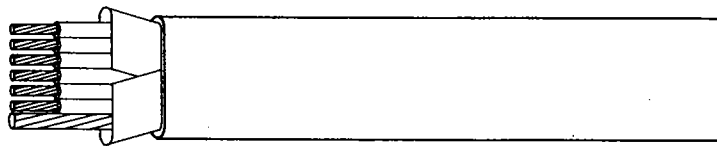

Flat (oval) multi-conductor shielded modular type computer interconnect cable consisting of stranded tinned copper conductors with thermoplastic insulation and a 22 AWG stranded fused tinned copper drain wire with an overall 100% coverage aluminum/polyester shield in a PVC (Polyvinyl chloride) jacket.

AWC Standard Number	Number of Conductors	AWG & Stranding	Insulation Thickness (Nom. in.)	Jacket Thickness (Nom. in.)	Outside Dimension (Nom. in.)
AWC19513	6	24-7/32	0.007	0.033	0.106 X 0.317
AWC19514	6	26-7/34	0.009	0.033	0.106 X 0.317
AWC19515	6	28-7/36	0.011	0.033	0.106 X 0.317

NOTE

Color code: 1) Blk, 2) Wht, 3) Red, 4) Grn, 5) Brn, 6) Blu

Available jacket colors: A = Black

CP = Chrome Gray

Available put-ups: 500, 1,000, 2,500, 5,000, 10,000 foot reels

Ordering example: AWC19513-A-500

Other color codes and/or jacket colors available upon request.

UL Recognition labeling available upon request.