


# PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
9/4/2007	A	18350	SPECIFICATION CREATED

**Parent Number:** 20162-

**Description:** 20 7/28 BC TXL per J1128 M-3075 OD 0.068"  
XLPE40

**DIAMETER:** 0.068  
**TOLERANCE ±:** 0.003

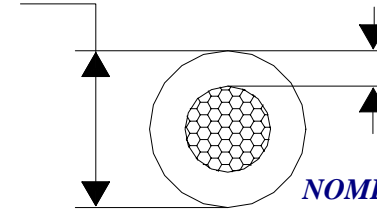

**NOMINAL WALL:** 0.016  
**MINIMUM WALL:** 0.013

**Stranding:** 7/28 BC LHL

**Style:** TXL per SAE J 1128, Delphi M-3075

**Insulation:** XLPE

**Print Legend:** NO PRINT

**Voltage:** Per SAE J 1128 this product is intended for use at a nominal system voltage of 60 Volts DC or less in surface vehicle electrical systems.

**Temperature:** The Temperature Class Rating is 125C. The Temperature Class rating is defined by SAE as " a class designation based on the retention of mechanical properties after 168 hours of aging at 30C above the temperature class rating".

**Notes:**

This product complies with European Directive 2002/95/EC (RoHS)

**Customer Approval:**

**Customer Part Nbr(s):** \_\_\_\_\_

**Approved By:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Title:** \_\_\_\_\_ **Company Name:** \_\_\_\_\_

**COLEMAN CABLE, INC**

1530 Shields Drive  
Waukegan, IL 60085



Phone: 1-800-323-9355  
www.colemancable.com